




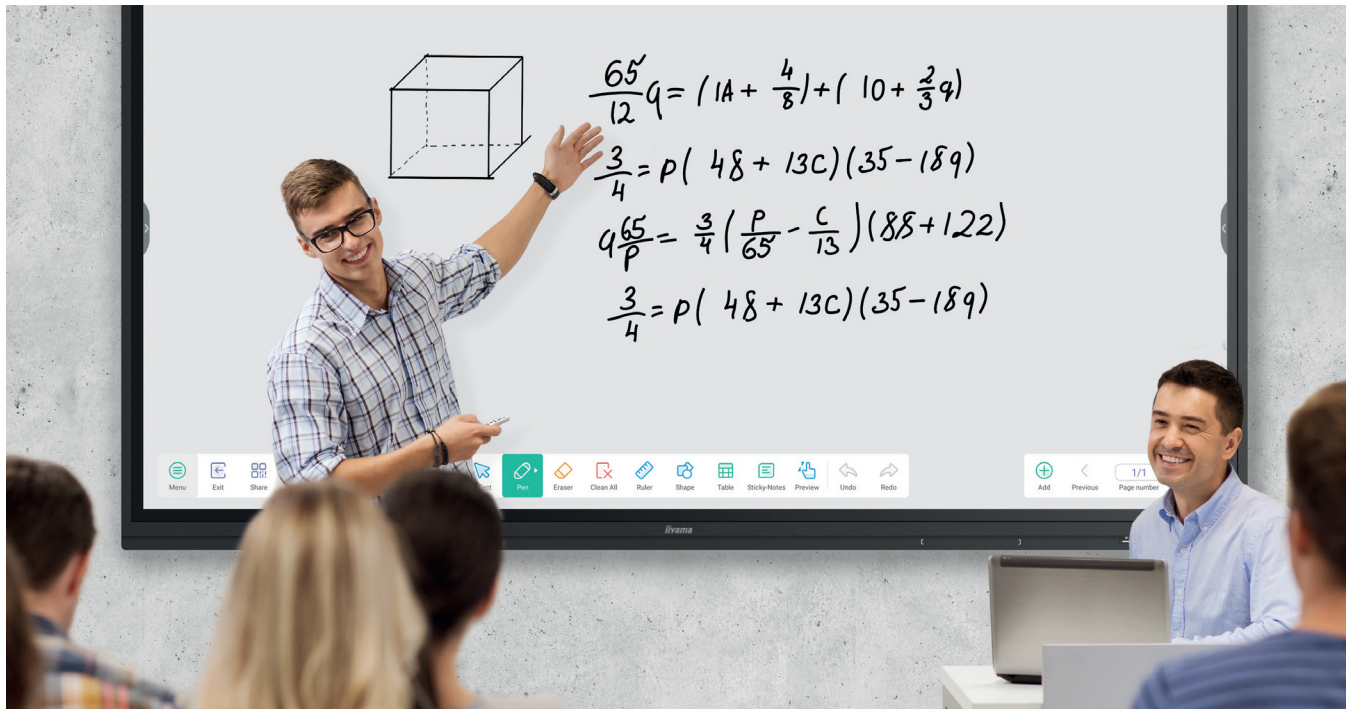

04-SERIES CAPTIVATE YOUR AUDIENCE

Today's students are tomorrow's professionals - helping to shape industry, science and progress. Our teachers and leaders demand performance, reliability and flexibility.

The **04-SERIES** from iiyama empowers all education, training and presentation environments to seamlessly deliver engaging content, collaborative tools and thanks to our hybrid solution deck of Android and Slot PC features, you can be sure that no matter what your Interactive aspiration, iiyama has the simplified solution just for you...

...this is why iiyama is the trusted Interactive Display brand for many of the world's largest organisations in education and business alike.

With sizes from **65"**, **75"**, **86"** and **98"** everyone will benefit from the flexibility and clarity that the **04-SERIES** delivers.

04-SERIES

AMAZING, EASY-TO-USE FEATURES YOU CAN EMPLOY EVERYDAY



PURETOUCH-IR

Delivers 1mm touch accuracy for the smoothest and fastest annotation with 20pt infrared touch technology.



STANDALONE SOLUTION

Slide-in a Slot PC and unlock all of the control, security and flexibility of Windows 10 IoT, including the entirety of the Microsoft eco system.



iiWARE 9.0

Features Note, Browser, Cloud Drive and the option for you to sideload relevant apps you require for your organisation.



SCREENSHARE PRO

Supports AirPlay, Chromecast and Miracast to easily share, stream and edit content from your device to your 04-Series and vice versa, back to your notebook, tablet or phone.



SECURITY

Utilise Screen lock and USB passcode protection to ensure user security and the new Clean app will clear all data and passwords used.



USB-C CONNECTION

Supports the latest in video, audio and touch signal via a single port and even charges your device with 65W power delivery.



04-SERIES SPECIFICATIONS AND ACCESSORIES



ProLite TE6504MIS-B2AG ProLite TE7504MIS-B2AG ProLite TE8604MIS-B2AG ProLite TE9804MIS-B1AG

Diagonal

65" (163.9cm) **75"** (189.3cm) **86"** (217.4cm)
98" (247.7cm)

Panel type	IPS, AG coated glass, zero air-gap
Resolution	3840 x 2160 (4K UHD)
Panel brightness	400cd/m ²
Operation time	24/7
Orientation	Landscape 3mm/7H
Glass thickness / hardness	PureTouch-IR, 20 Touch points
Touch technology	HDMI x 3 (2.0), USB-C x 1 (3.1, 65W charging, Touch) HDMI x 1 (2.0)
Video IN	
Video OUT	S/PDIF (optical), MiniJack, speakers 2 x 16W
Audio IN	MiniJack
Audio OUT	
Controls	RS232c x 1 (DSUB 9pin), RJ45 (LAN) x 2 (Auto switch for PC & Android, 1000MB), USB Touch x 2
Media Playback	5 x (front side: 2 x v.3.0, right side: 2 x v.3.0, 1 x USB-C v.3.1)
Dimensions W x H x D / Weight	65" 1489 x 897 x 86mm / 38kg 75" 1709 x 1020 x 86mm / 50.8kg 86" 1957 x 1159 x 86mm / 64.4kg 98" 2245 x 1323 x 91mm / 101.5kg
Features	iiWare 9.0 (Android OS), pre-installed apps ScreenSharePro & EShare, WiFi module slot (OWM002, OWM001(TE9804)), (OPS) PC Slot, OTA firmware, Ambient Light Sensor, 4 dual function Touch pens, mounting bracket for NUC, mounting brackets for NUC and webcam (excl. TE9804)
(OPS) PC option	Slot PC: SPC5801BC, SPC5802BC (TE65/75/8604) OPS PC: OPC5A01BC (TE9804)
Wall Mount options	MD 052B2000 (TE65/7504), MD 052B2010 (TE86/9804), MD 052B2040 (TE9804), MD 052W7150K (TE65/75/8604), MD 052W155K (TE9804), MD 052B7285 (soundbar)
Trolley Cart options	MD 062B7275 A (TE6504), MD 062B7295K (TE75/8604), MD 062B7105K (TE9804)
Warranty	5-year standard warranty

02-04 SERIES COMPARISON



ProLite

TE6502MIS-B1AG | TE7502MIS-B1AG | TE8602MIS-B1AG*

Display characteristics	
Size category	65", 75" & 86"
Panel type	VA, IPS*
Anti-Glare Coating	✓
Zero Air-Gap	×
Touch technology	Infrared
Touch points	20
Native resolution	3840 x 2160 (4K UHD)
Panel brightness (cd/m²)	400
Light transmittance	88%
Static contrast	5000:1, 1200:1*
Max. Operating time	16/7
Interfaces & connectors	
Video IN	VGA, 2x HDMI (2.0)
Audio IN / OUT	MiniJack (IN & OUT)
Speakers	2x 10W Speakers (front-faced)
Control	2x USB (touch) IN, RS232c, 2x RJ45 (Auto switch for PC & Android, 1000MB)
USB	4x USB (2x 2.0 front, 2x 2.0 right side)
Features	
Android / iiWare	Android 9.0 OS/ iiWare 8.0
ScreenSharePro & Eshare	✓
Ambient light sensor	✓
OTA firmware update	✓
Internal memory	16GB
Metal housing	✓
Included / optional	
Wifi Collaboration module	OWM002
Metal housing	✓
Mounting brackets for NUC/webcam	✓
Touch pens (dual function tips)	2x
Optional (OPS) Slot PC	OPC5801BC

TE6504MIS-B2AG | TE7504MIS-B2AG | TE8604MIS-B2AG | TE9804MIS-B1AG*

Display characteristics	
Size category	65", 75", 86" & 98"
Panel type	IPS
Anti-Glare Coating	✓
Zero Air-Gap	✓
Touch technology	PureTouch-IR
Touch points	20
Native resolution	3840 x 2160 (4K UHD)
Panel brightness (cd/m²)	400
Light transmittance	88%
Static contrast	1200:1
Max. Operating time	24/7
Interfaces & connectors	
Video IN	VGA, 3x HDMI (2.0), USB-C (3.1)
Audio IN / OUT	MiniJack (IN & OUT) / S/PDIF
Speakers	2x 16W Speakers
Control	2x USB (touch) IN, RS232c, 2x RJ45 (Auto switch for PC & Android, 1000MB)
USB	5x USB (2x 3.0 front, 2x 3.0 right side, 1x 3.1 USB-C)
Features	
Android / iiWare	Android 9.0 OS/ iiWare 9.0
ScreenSharePro & Eshare	✓
Ambient light sensor	✓
OTA firmware update	✓
Internal memory	32GB
Metal housing	✓
Included / optional	
Wifi Collaboration module	OWMW002, OWM001*
Metal housing	✓
Mounting brackets for NUC/webcam	✓ (excl. TE9804)
Touch pens (dual function tips)	4x
Optional (OPS) Slot PC	SPC5801BC-2, SPC5802BC, OPC5801BC*